



How to make an announcement

1. Tap **ANNOUNCE**.




2. Available announcement targets are displayed:

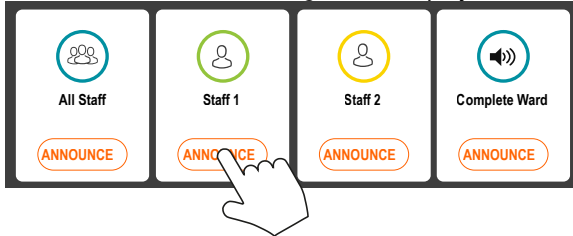


3. Tap **ANNOUNCE** of the desired target.
4. The speech connection is established.
5. Make the announcement.
6. Tap **END** to finish the announcement.

How to call

1. Tap **CALL**.



2. Available call targets are displayed.

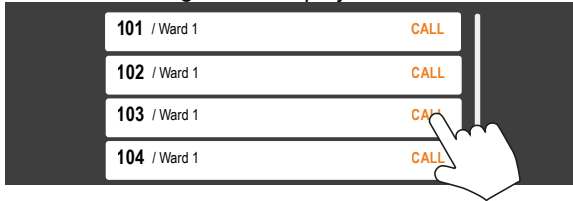


3. Tap **CALL** of the desired target.
4. The speech connection is established.




5. Talk to the person on the other end.
NOTE! If the privacy function at the other end is on, ask the person to press a call button to turn the privacy off.
6. Tap **CLOSE** to close the speech connection.

How to activate/deactivate ward coupling


1. Tap **SETTINGS**.



2. Tap **Ward coupling** in the left column.

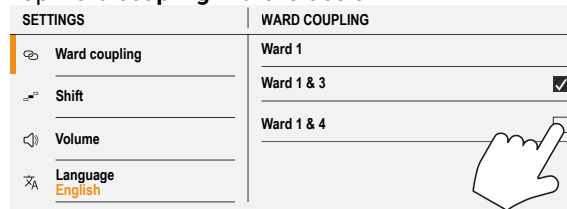


3. Tap the desired ward coupling.
4. Tap **HOME** to end the procedure.

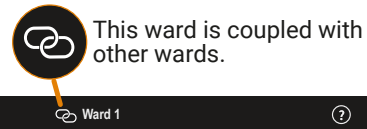


How to activate a shift


1. Tap **SETTINGS**.



2. Tap **Shift** in the left column.

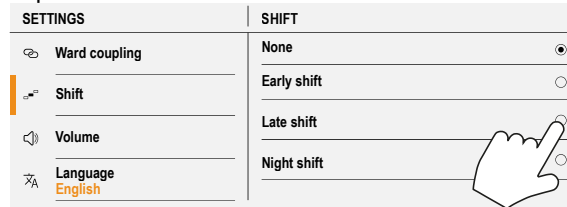

3. Tap the desired shift.
4. Tap **HOME** to end the procedure.

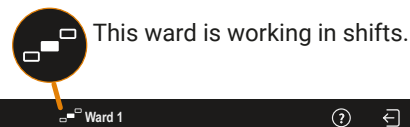


Tunstall




Quick reference guide

ComStation^{IP}

Order no. 76 0605 50

 Please also read the detailed user guide. To do so, tap on the question mark in the header or download the PDF via the QR code.




 **Fault in the nurse call system!** Immediately inform a technician, if this icon appears in the home screen header.

Home screen


- To start the ComStation^{IP}, tap **LOGIN** in the login screen.

The home screen appears and shows the calls and staff presence of your ward:

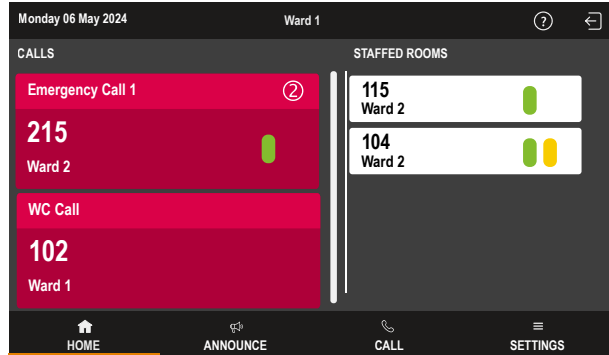

Log out! Log out, when you leave the ComStation^{IP}.

How calls are displayed



Alarms:
Blue flashes very fast.
Very fast sound sequence.

Emergency calls:
Red flashes fast.
Fast sound sequence.

Calls:
Red flashes slowly.
Slow sound sequence.



Exceptions:
Grey flashes slowly.
Slow sound sequence.

Several calls in one room




Number of calls in the room. Stated if there is more than one call.

How to answer a call

- Tap on the call.



A speech connection to the call location is established.

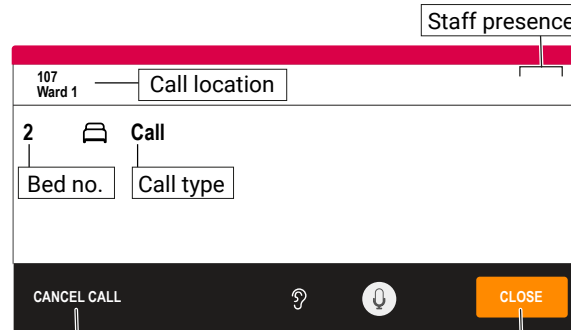


Cancel the call (only for call types "Call", "Service Call")

Close the speech connection

- Speak to the caller and ask what help is needed.
- Tap **CLOSE** to close the speech connection. The speech connection is closed. The call is displayed as an answered call.
- Organise the required help.
- Call handling is complete when the call has been cancelled at the call location or from the ComStation^{IP} using the **CANCEL CALL** button.

How answered calls are displayed

As long as an answered call is not cancelled, it is displayed as an answered call.

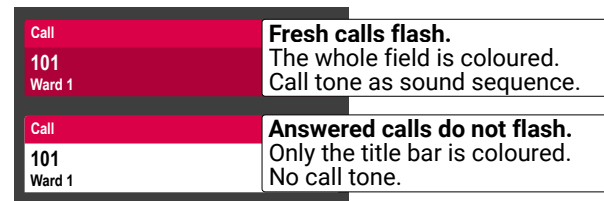

Fresh calls flash.
The whole field is coloured.
Call tone as sound sequence.


Answered calls do not flash.
Only the title bar is coloured.
No call tone.

How to speak to staff

- Tap the entry in the list of staff presences.



A speech connection to the staff is established.

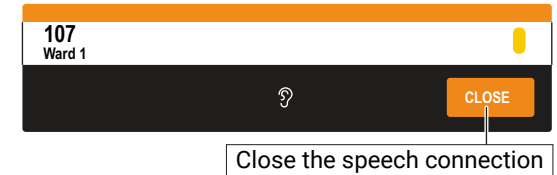

Close the speech connection

Status of speech connection

	Privacy in the room You cannot listen to what is said in the room.
	No privacy in the room You can listen to what is said in the room.
	Your microphone is turned on. The person in the room can hear you.
	Your microphone is turned off The person in the room cannot hear you.
	Volume up by tapping the icon.
	Volume down by tapping the icon.